


SL Seline

Instructions for Seline Chronograph watches

- A) DISPLAYS AND BUTTONS
- B) SETTING THE TIME
- C) SETTING THE DATE
- D) USING THE CHRONOGRAPH
- E) CHRONOGRAPH RESET (INCL. AFTER REPLACING THE BATTERY)

- **A) DISPLAYS AND BUTTONS**

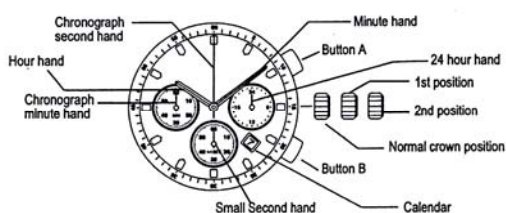

- **B) SETTING THE TIME**

1. Pull the crown out to the second position
2. Turn the crown to set the hour and minute hands
3. When the crown is pushed back to the normal position, the small second hand begins to run

- **C) SETTING THE DATE**

1. Pull the crown out to the first position
2. Turn the crown counter clockwise to set the date
 - If the date is set between the hours of around 9:00 PM and 1:00 AM, the date may not change on the following day
3. After the date has been set, push the crown back to the normal position.


- **D) USING THE CHRONOGRAPH**

The chronograph is able to measure and display time in 1/1 second united up to a maximum of 59 minutes and 59 seconds

The chronograph second hand keeps continuously for 59 minutes and 59 seconds after starting.

Measuring time with the chronograph

1. The chronograph can be started and stopped each time button A is pressed.
2. Pressing button B resets the chronograph and the chronograph second hand and minute hand return to zero position.



- **E) CHRONOGRAPH RESET (INCL. AFTER REPLACING THE BATTERY)**

This procedure should be performed when the chronograph second hand does not return to the zero position after the chronograph has been reset, and including after the battery has been replaced.

1. Pull the crown out to the second position
 2. Press button A to set the chronograph second hand to the zero position. The chronograph hand can be advanced rapidly by continuously pressing button A.
 3. Once the hand has been zeroed, return the crown to the normal position.
- Do not push the crown to the normal position while the chronograph second hand returns to the zero position. It stops on the way when the crown is returned to the normal position and its position is recognized as the zero position.